


# QUICKSTART



Position the system on solid ground.  
Open the display.




Connect plug to socket (230V).  
Only use the supplied battery loader.

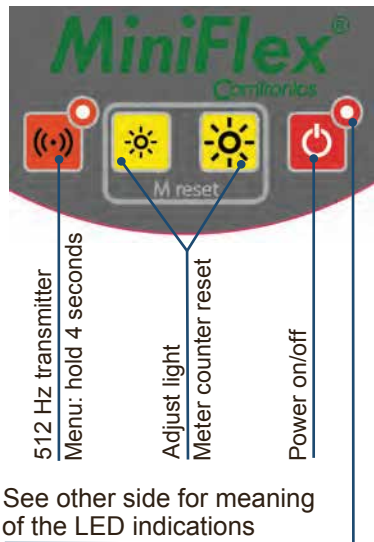

See other side for meaning of the LED indications



1. Take the camerahead with the protective shell out of the drum.
2. Take the head out of the shell.
3. Place the shell in the store position.

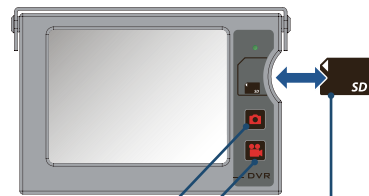

Take a picture:  
press button


Start video  
recording:  
press button.  
Stop recording:  
press again.

To take out card:  
Press the SD  
card and take  
card out of  
opening.

End of the inspection:  
Put camerahead in protective  
shell and put this unit in the  
drum. This prevents  
unnecessary load on the rubber  
part in order to keep this straight.



## Led indications

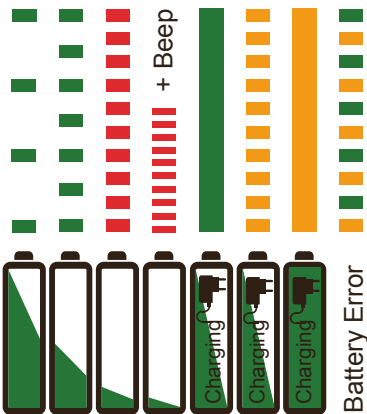

On

Off

## General

- *Always* read the entire manual prior to the use of the system.
- Complete manual can be downloaded via: [www.camtronics.eu](http://www.camtronics.eu)
- No claims can be made regarding this Quickstart.

## Maintenance



- Clean Miniflex with a moist cloth. *Never spray clean the system!*
- Use and store in a well ventilated environment. Temperature: min 0°C and max 45°C.

## Problem solving

Horizontal lines on the displayed image.

Check if transmitter is activated.

Switch off transmitter and start video recording or take a picture.

To take corners it is necessary to grease this part before starting an inspection. Use acid-free vaseline.

